



'Light' proving tanks

1-2 litres

Data sheet: DS/MC/0007/EN Ed. 06-2019

'Light' model proving tanks are used for calibration of dosing pumps, tanks and fuel dispensers.

Standard

These proving tanks conform to OIML R120 International Recommendation.


Tolerance of measurement is as follows:

1 L	→	± 2,5 mL	} Conform to OIML R120
2 L	→	± 2,5 mL	

Reading scale partition and range

1 L	→	2,5 mL / ± 15 mL
2 L	→	2,5 mL / ± 15 mL

Upon request: the proving tank can be supplied with calibration certificate recognized by EA, IAF, and ILAC (valid both at European and at international level).

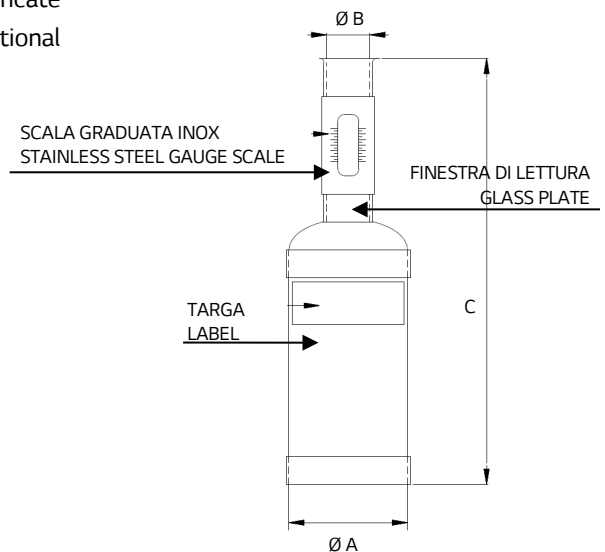

Technical data

CAPACITY	DIMENSIONS (mm)			WEIGHT (KG)
	A	B	C	
1 LITRE	85	32	305	1,1
2 LITRES	116	31	360	2,1

Construction

Body:	AISI 304
Reading scale:	Plexiglas, on the neck of the proving tank
Gauge plate:	AISI 304, adjustable for calibration and fixed on the neck with sealed screws
Cap:	Rubber

www.isoilmeter.com